





MATERIAL LIST

ITEM	QTY	SECTION	LENGTH	GRADE	MASS(kg)
p-1	1	PL10×1800	2200	Q355B	302
p-2	2	PL10×196	1957	Q355B	58
p-3	2	PL10×196	2351	Q355B	62
p-4	1	PL5×2000	2400	Q355B	188
p-5	2	RHS180×100×4	1923	Q355B	64
p-6	12	PL5×175	717	Q355B	60
p-7	9	PL10×175	902	Q355B	81
p-8	2	PL10×175	1957	Q355B	50
p-9	2	PL10×175	1957	Q355B	50
p-10	2	PL10×175	1957	Q355B	50
LT-1	4	Outsourced parts(2T)		Q355B	4
TOTAL MASS					969

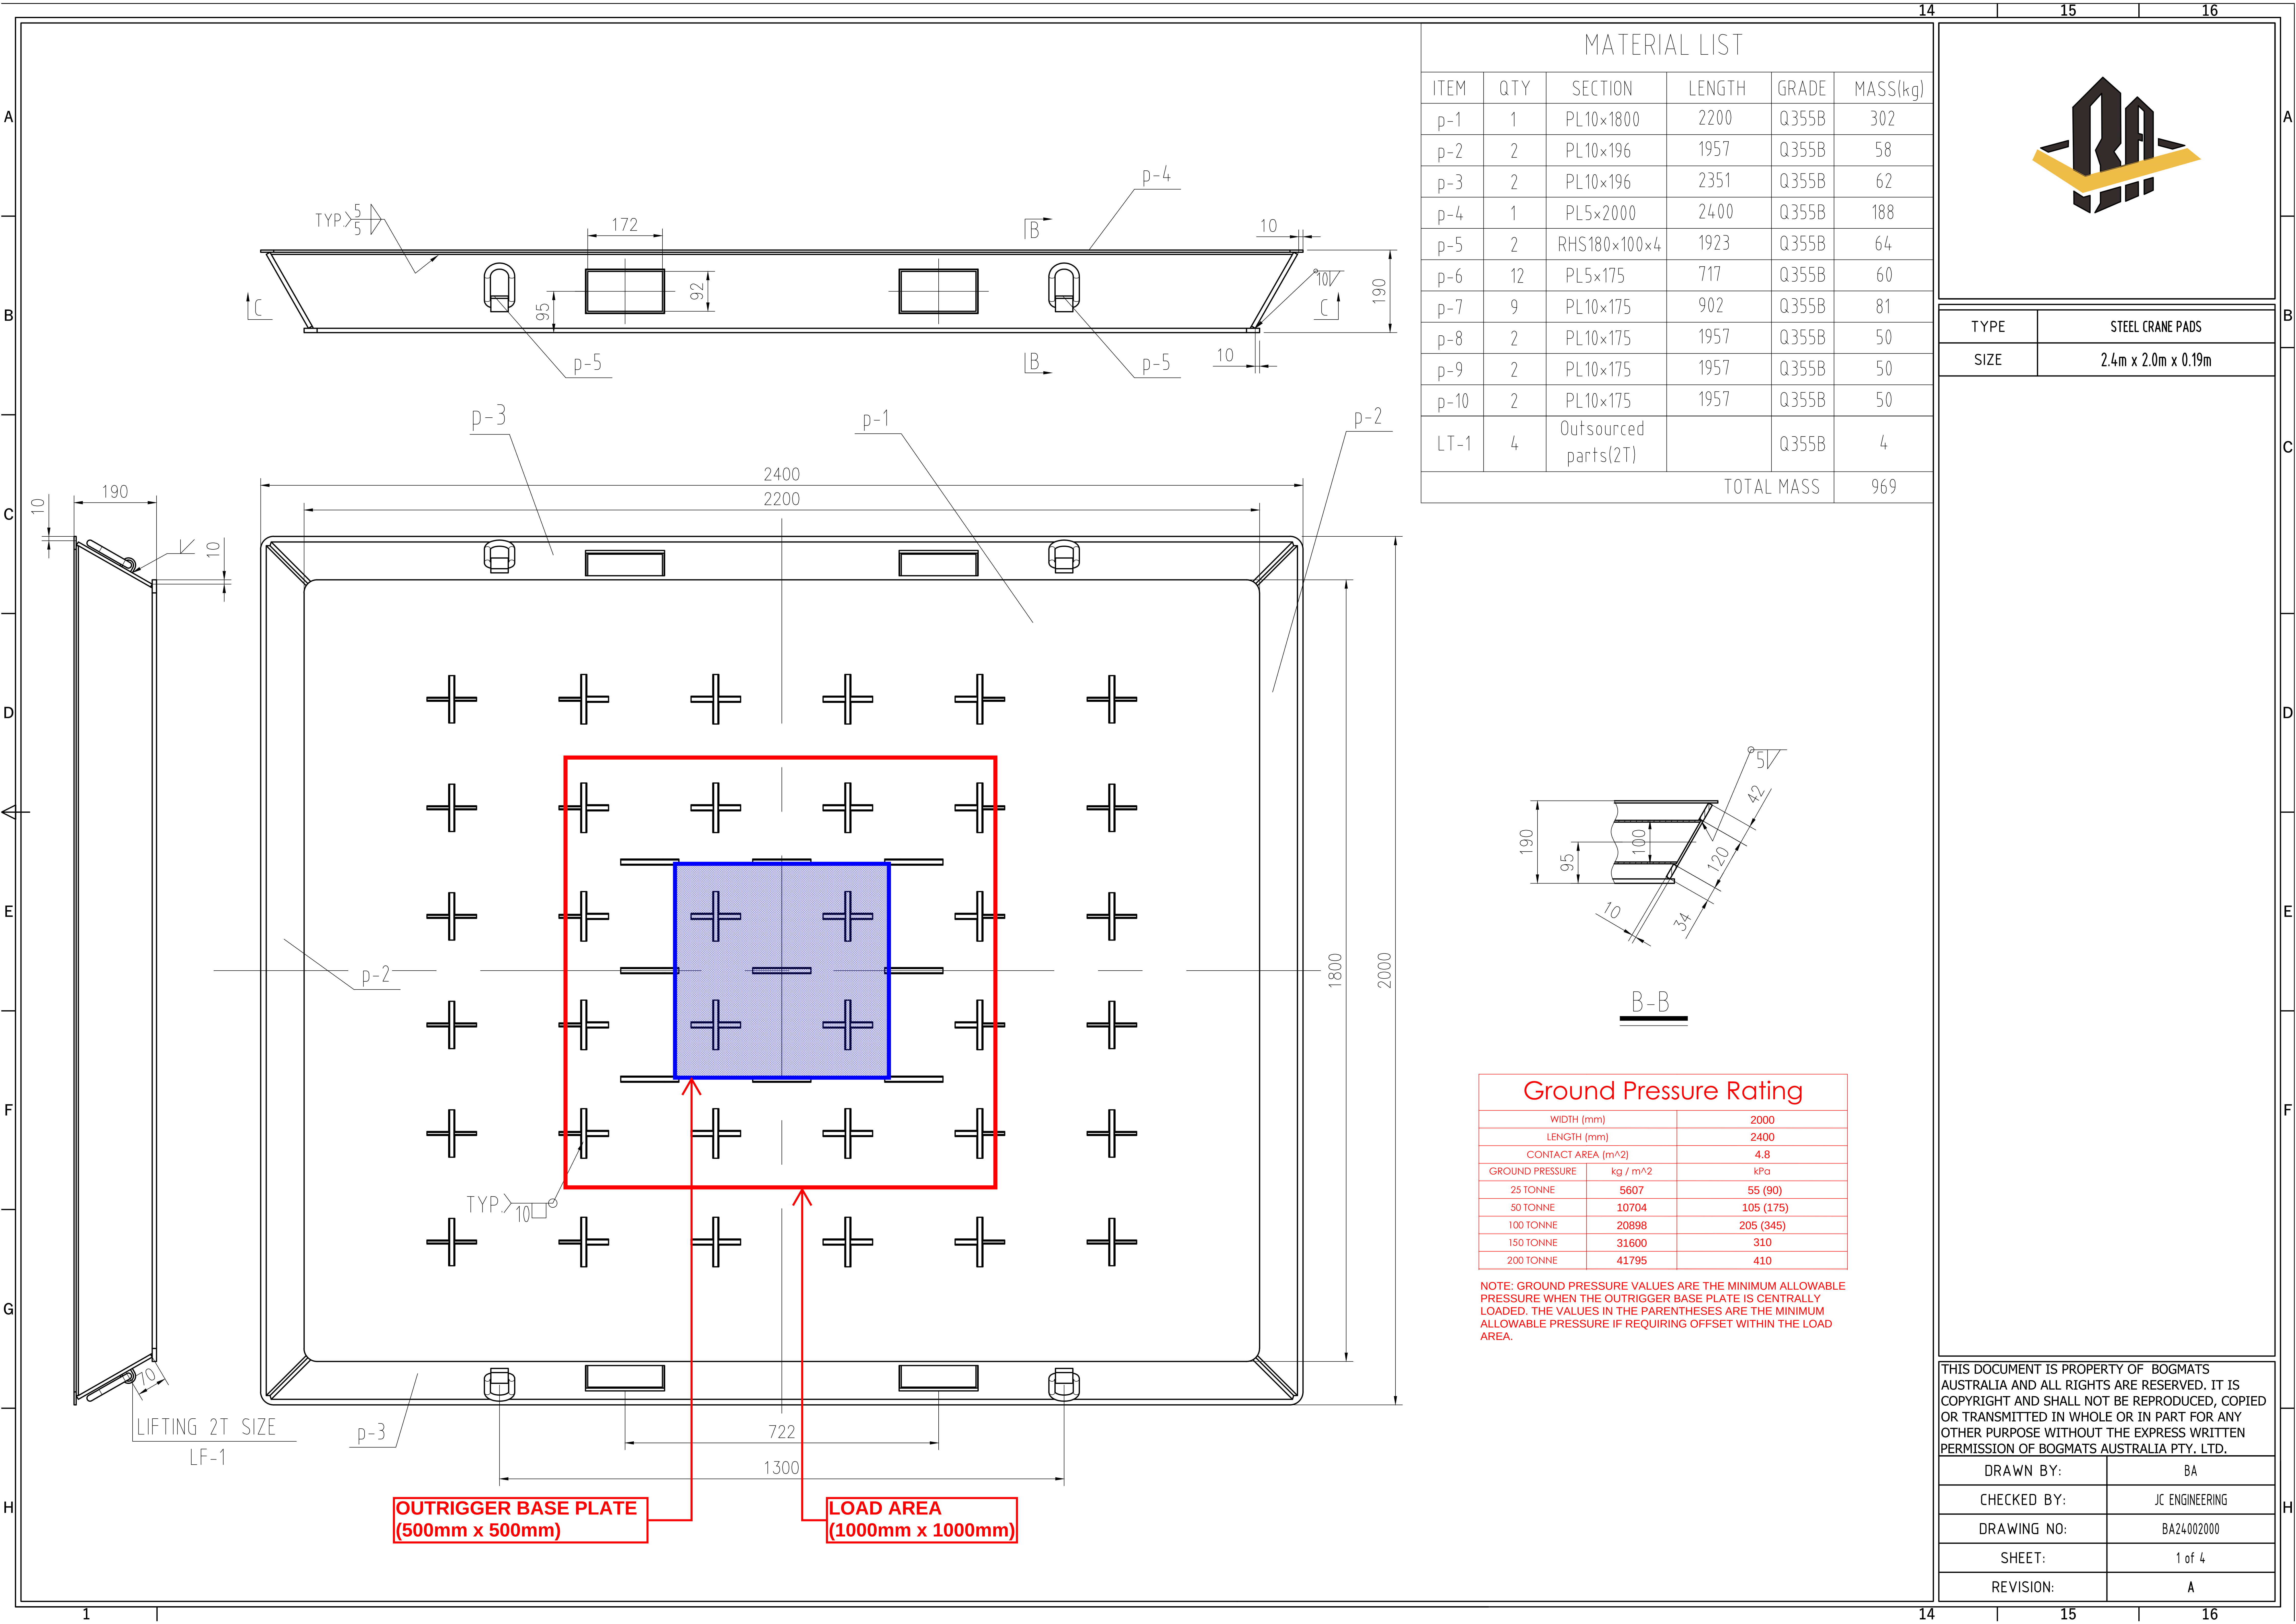

TYPE	STEEL CRANE PADS
SIZE	2.4m x 2.0m x 0.19m

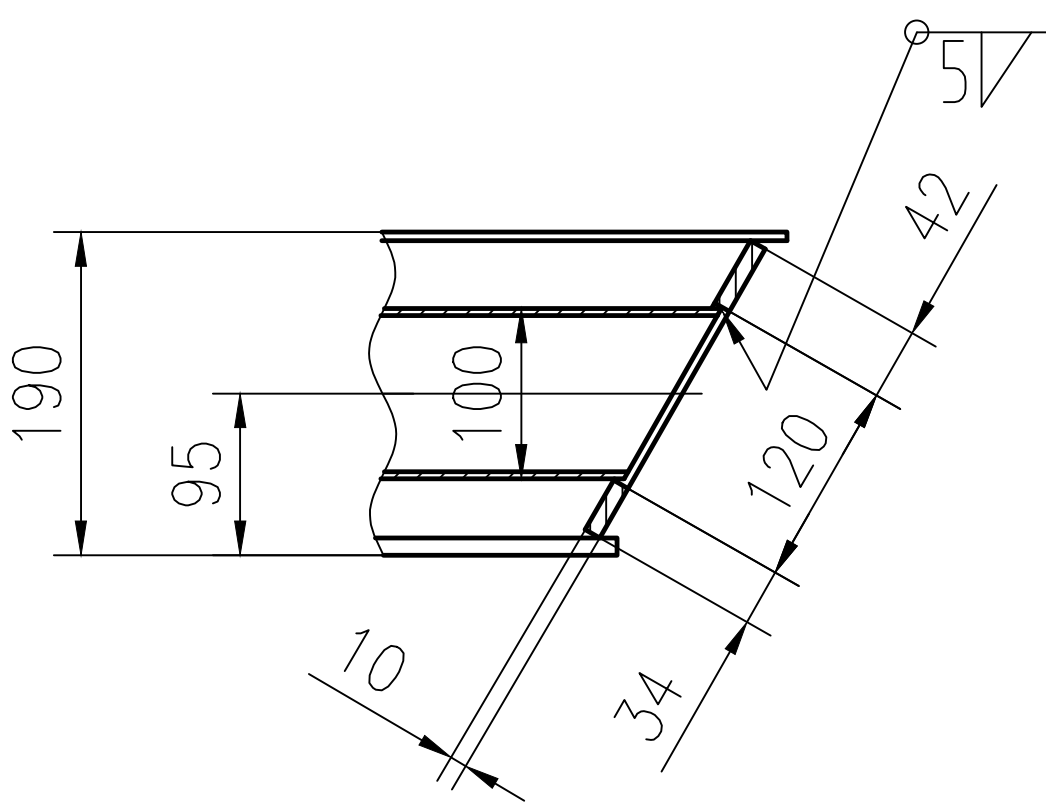

B-B

Ground Pressure Rating

WIDTH (mm)		2000
LENGTH (mm)		2400
CONTACT AREA (m^2)		4.8
GROUND PRESSURE	kg / m^2	kPa
25 TONNE	5607	55 (90)
50 TONNE	10704	105 (175)
100 TONNE	20898	205 (345)
150 TONNE	31600	310
200 TONNE	41795	410

NOTE: GROUND PRESSURE VALUES ARE THE MINIMUM ALLOWABLE PRESSURE WHEN THE OUTRIGGER BASE PLATE IS CENTRALLY LOADED. THE VALUES IN THE PARENTHESES ARE THE MINIMUM ALLOWABLE PRESSURE IF REQUIRING OFFSET WITHIN THE LOAD AREA.

THIS DOCUMENT IS PROPERTY OF BOGMATS AUSTRALIA AND ALL RIGHTS ARE RESERVED. IT IS COPYRIGHT AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN WHOLE OR IN PART FOR ANY OTHER PURPOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF BOGMATS AUSTRALIA PTY. LTD.

DRAWN BY:	BA
CHECKED BY:	JC ENGINEERING
DRAWING NO:	BA24002000
SHEET:	1 of 4
REVISION:	A